

Flexible Duct

Slogan: We deliver fresh air.

Name: Aluminum Foil Duct (single/double layer)



Construction:

Aluminum foil PET+steel wire

Product features:

- Fire resistant
- Lightweight duct
- Cost effective
- Easy installation
- Spiral

Application: Air, dust, fume, heat

Duct Construction : Aluminum PET steel wire

Wall Thickness : 0.02mm-0.025mm

Inner Diameter : 2"-24"(52mm-609mm)

Temperature Range : -30°C/+150°C

Air Velocity : 30m/s (max)

Operating Pressure : 2500pa

Standard Length : 10m

Fire Resistance : Fire retardant

Package : opp bag + carton or mixed passage

Slogan: We deliver fresh air.

Name: Aluminum Duct



Construction:

Aluminum

Product features:

- Fire resistant
- Lightweight duct
- Cost effective
- Easy installation
- Easy bend

Application: Air, fume, chemical fumes, exhaust systems, HAVC, smoke ejections, ventilation

Duct Construction : Aluminum

Wall Thickness : 0.05mm-0.15mm

Inner Diameter : 2"-12"(52mm-300mm)

Temperature Range : -30°C/+400°C

Air Velocity : 30m/s (max)


Operating Pressure : 2000pa

Standard Length : 3m, 5m

Fire Resistance : Non-flammable

Package : opp bag + carton or mixed passage

Slogan: We deliver fresh air.
 Name: PVC&AL Combined Duct

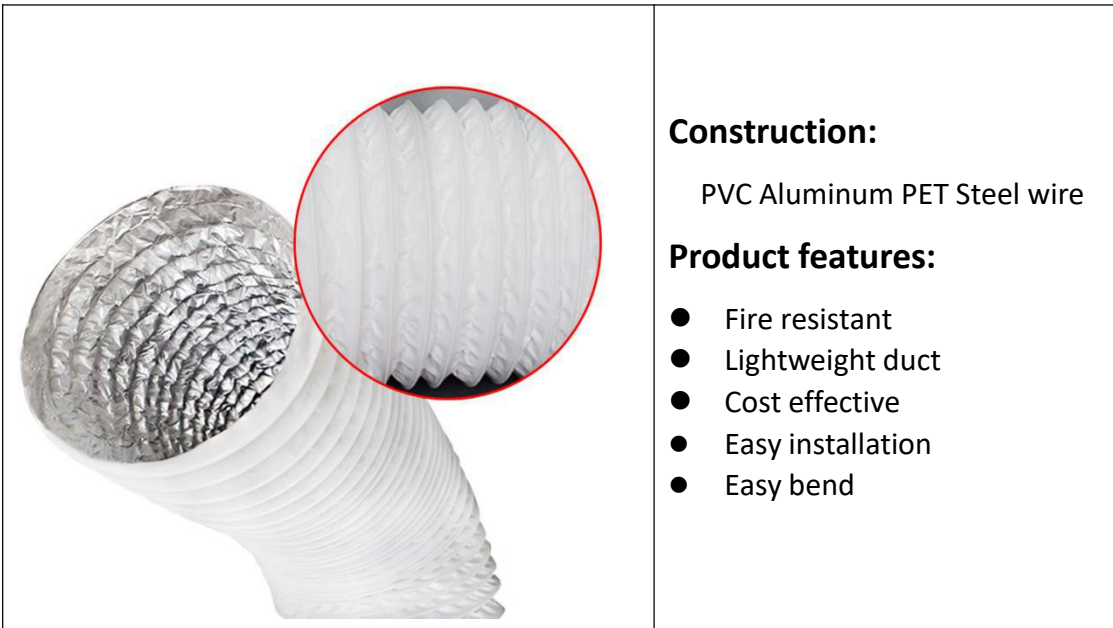

Construction:

PVC Aluminum PET Steel wire

Product features:

- Fire resistant
- Lightweight duct
- Cost effective
- Easy installation
- Easy bend

Application:	Air, fume, exhaust systems, HAVC, smoke ejections, ventilation
Duct Construction :	PVC Aluminum PET Steel wire
Wall Thickness :	0.05mm-0.15mm
Inner Diameter :	2"-24"(52mm-609mm)
Temperature Range :	-30°C/+100°C
Air Velocity :	30m/s (max)
Operating Pressure :	2500pa
Standard Length :	10m
Fire Resistance :	Fire retardant
Package :	opp bag + carton or mixed passage

Slogan: We deliver fresh air.

Name: Nylon Duct



Construction:

PVC Coated Fiber

Product features:

- Fire resistant
- Lightweight duct
- Cost effective
- Easy installation
- Easy bend
- Ground electric drainage

Application: Air, fume, exhaust gas extraction, acid-base resistance, HAVC, smoke ejections, ventilation

Duct Construction : PVC Coated Fiber+elastic steel wire

Wall Thickness : 0.3mm

Inner Diameter : 2"-24"(52mm-609mm)

Temperature Range : -10°C/+100°C

Air Velocity : 28m/s (max)

Operating Pressure : 3000pa

Standard Length : 10m

Fire Resistance : Fire retardant

Package : opp bag + carton or mixed passage

Slogan: We deliver fresh air.

Name: PVC Steel Wire Duct



Construction:

PVC Steel Wire

Product features:

- Fire proof
- Lightweight duct
- Cost effective
- Easy installation
- Easy bend

Application: Air, exhaust gas extraction, bathroom ventilation

Duct Construction : PVC + steel wire

Wall Thickness : 0.1mm

Inner Diameter : 2"-24"(52mm-609mm)

Temperature Range : 5°C/+80°C

Air Velocity : 29m/s (max)

Operating Pressure : 2000pa

Standard Length : 10m

Fire Resistance : Fire retardant

Package : opp bag + carton or mixed passage